


Fuentes de alimentación · Alimentations
Alimentatori · Fontes de alimentação · Power supplies
 FA QC 12 · FA QC 122 · FA QC 24 · FA QC 242

REFERENCE	RÉFÉRENCE	ARTICOLO	REFERÊNCIA	REFERENCE		FA QC 12	FA QC 122	FA QC 24	FA QC 242
Code	Code	Codice	Código	Code		053001	053002	053003	053004
Outputs	Sorties	Uscite	Sáidas	Outputs	Nº	1	2	1	2
Frequency Range	Bande passante	Frequenze	Frequências	Frequency Range	MHz	47-2400*	47-862	47-862	47-862
Insertion loss	Pertes d'insertion	Attenuazione di passaggio	Perdas de passagem	Insertion loss	dB	1	<4	1	<4
Output voltage	Tension de sortie	Tensione d'uscita	Tensão de saída	Output voltage	Vdc	12	12	24	24
Maximum current output	Courant max. de sortie	Corrente maxima	Corrente máxima	Maximum output current	mA	300	300	150	150
Mains voltage	Secteur	Alimentazione	Alimentação	Mains voltage	Vac	100-240			

* Con paso de alimentación LNB (13-18Vdc / 22KHz)
 Avec passage de courant LNB (13-18Vdc / 22KHz)
 Con passaggio DC LNB (13-18Vdc / 22KHz)
 Com passo de alimentação LNB (13-18Vdc / 22KHz)
 With LNB DC pass (13-18Vdc / 22KHz)




01.

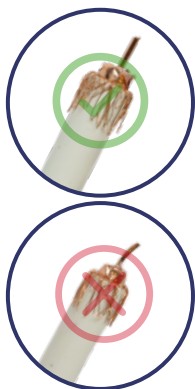

- ES El conductor central debe estar recto
- FR L'âme centrale conductrice doit être bien droite.
- IT Il conduttore centrale deve essere dritto
- PT O condutor central deve ser reto
- EN The inner conductor must be straight

02.

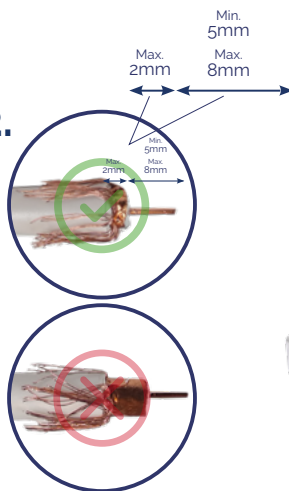

- ES Medidas de pelado de cable
- FR Préparer le dénudage des câbles selon les indications ci-dessus.
- IT Misure di spellatura del cavo
- PT Medidas de decapagem de cabos
- EN Cable stripping measures

03.



- ES Realizar las conexiones y fijar el alimentador a la pared utilizando los tacos y tornillos suministrados
- FR Réaliser les connexions et fixer le boîtier au mur. Se servir des chevilles et des vis fournies.
- IT Effettuare i collegamenti e fissare l'alimentatore al muro con i tasselli e le viti fornite in dotazione.
- PT Fazer as conexões e fixar o modulador para a parede usando as buchas e parafusos fornecidos.
- EN Make connections and fix the modulator to the wall using the plugs and screws supplied.

04.



- ES Conectar el alimentador a la corriente. El led deberá encenderse
- FR Branchez la fiche plate bipolaire dans la prise électrique. La led doit s'allumer.
- IT Collegare l'alimentatore alla corrente. Il led si dovrà illuminare
- PT Ligue o alimentador para o fornecimento de energia. O LED deve acender
- EN Connect the power supply to the mains. The LED should light on

