


## KODAK KCR2 MAX Lithium battery

Effective: 13/01/2021

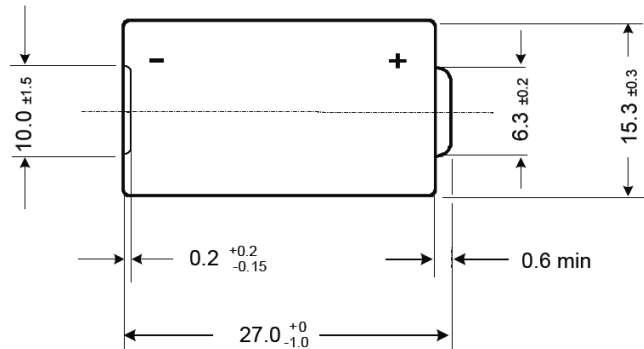


Dimensions are in millimeters and include label.

<b>Chemical system:</b>	Lithium/Manganese Dioxide, Li / MnO <sub>2</sub>
<b>Designations:</b>	IEC CR15H270, ANSI 5046LC
<b>Nominal Voltage:</b>	3.0 V
<b>Nominal Capacity:</b>	800 mAh at 10 mA to 1.8 Volts
<b>Weight:</b>	10 g
<b>Volume:</b>	5.16 cm <sup>3</sup>
<b>Normal storage temperature:</b>	+10 – +25 °C, RH no more than 75%.
<b>Normal Operating temperatures:</b>	-20 – +50 °C
<b>Maximum Operating temperatures:</b>	-40 – +60°C
<b>Reaction:</b>	Li + MnO <sub>2</sub> → LiMnO <sub>2</sub>
<b>Terminals:</b>	Flat contacts
<b>Jacket:</b>	Aluminium label
<b>Approximate Lithium content:</b>	<=0.3 grams / cell

**Note:**

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.

Recognized under the  
Component Program of  
Underwriters Laboratories INC.



The Kodak trademark, logo and trade dress are used under license from Kodak.  
© 2021 STRAND EUROPE LTD.  
[www.kodakbatteries.strand europe.com](http://www.kodakbatteries.strand europe.com)